


# TEI Drill Heads

- Automatic Stroke Control ASA
- Full Power Only When Drilling
- Built on 30 Years of Experience


**Innovation** You Can See, **Power** You Can Feel

## SEVEN DRIFTER MODELS

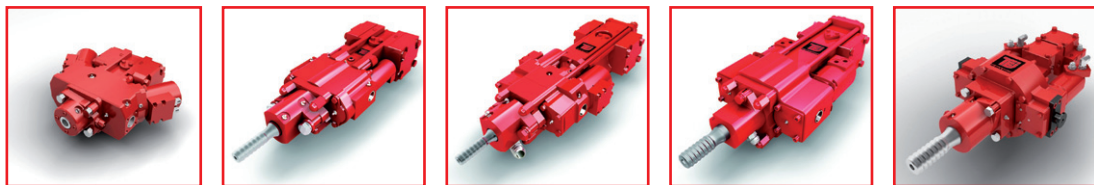

	<b>TE160/HT</b>	<b>TE260/HT</b>	<b>TE360</b>	<b>TE560</b>	<b>TE1000</b>
<b>Impact Energy</b>	35-60 lbf-ft	65-95 lbf-ft	90-120 lbf-ft	180-315 lbf-ft	393-637 lbf-ft
<b>Impact Frequency</b>	6500-5000 BPM	5000-3600 BPM	4200-3400 BPM	3500-2200 BPM	2700-1700 BPM
<b>Output Power</b>	7-9 HP	10-10.5 HP	11.5-12.4 HP	19-21 HP	30.1 HP
<b>Rotation Torque</b>	100-1000 lbf-ft	200-1000 lbf-ft	1800 lbf-ft	3000 lbf-ft	Up to 10,000 lbf-ft
<b>Weight</b>	105/165 lbs	144/182 lbs	210 lbs	544 lbs	842 lbs

## FOUR ROTARY HEAD MODELS

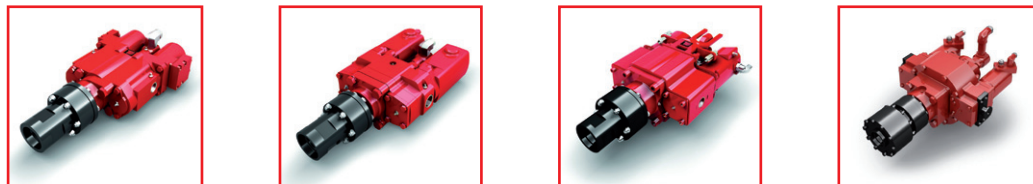

	<b>RDS250</b>	<b>RDS350</b>	<b>RDS550</b>	<b>RDS1000</b>
<b>Rotation Torque</b>	1000 lbf-ft	2000 lbf-ft	5000 lbf-ft	10,000 lbf-ft
<b>Rotation Speed</b>	500 RPM max	600 RPM max	150 RPM max	150 RPM max
<b>Weight</b>	106 lbs	137 lbs	237 lbs	742 lbs

TEI calculates a 40% loss of hydraulic power in our specifications.  
Specifications subject to change without notice.